

LEAF 001 sidetable

Design

Gordon Guillaumier

Description

Side table

Structure

AISI 304 stainless steel frame treated with electrostatic powder painting with polyester base that gives more protection from scratches and also the final coloring to the product.

Top

Gres

A hardwearing material obtained from compacting 99% pure materials such as minerals and clay at a high temperature (around 1250°) without the addition of synthetic resins or other chemical substances. The non-porous surface has a liquid absorption capacity of less than 0.5% so the material will be frost-proof, resistant to any type of stain and extremely resistant to surface abrasion.

The compactness of the material and the quality of the minerals used in its production make it very resistant to impact and bending (2mm tolerance per linear metre).

The material is Class A1 fire retardant and does not contain chlorine, asbestos or any other environmentally harmful substance.

Glazed gres

Glazed gres is obtained by subjecting gres to a special manufacturing process. After heating the material, the stoneware tile is dipped in tanks containing crystalline enamel in liquid form before being fired for the second time to vitrify the enamel. The material is Class A1 fire retardant and does not contain chlorine, asbestos or any other environmentally harmful substance.



Weight

Structure: 11 kg


Storage Cover

Available

Finishes

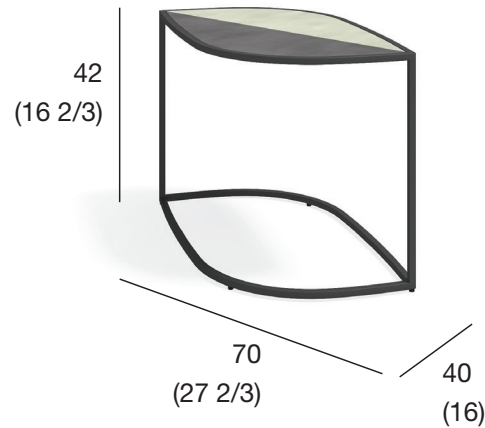


structure: 01 smoke



structure: 02 milk



structure: 01 smoke




structure: 02 milk




LEF001-01-51-52
smoke / gres top fog+ivory



LEF001-02-51-52
milk / gres top fog+ivory



LEF001-01-44-43
smoke / gl.gres top storm+taupe




LEF001-02-42-43
milk / gl.gres top ice+taupe



LEF001-01-51-53
smoke / gres top fog+ash




LEF001-02-51-53
milk / gres top fog+ash




LEF001-01-44-46
smoke / gl.gres top storm+jade




LEF001-02-42-44
milk / gl.gres top ice+storm



LEF001-01-51-54
smoke / gres top fog+nut




LEF001-02-51-54
milk / gres top fog+nut




LEF001-01-44-48
smoke / gl.gres top storm+water



LEF001-02-42-46
milk / gl.gres top ice+jade



LEF001-01-44-42
smoke / gl.gres top storm+ice



LEF001-02-42-48
milk / gl.gres top ice+water

Maintenance

Stainless Steel

In case of exposition to weather conditions, especially in corrosive environments, (for instance near the sea), to avoid rust formation, it is recommended to wash regularly the product with mild fresh water. If the product needs a thorough cleaning, use a neutral soap (UNIVERSAL CLEANER by RODA) and warm or mild water. Dry immediately to avoid stains and halos caused by water.

Brush following the direction of polish (if the product is not painted) and use a microfiber cloth to obtain

a better result. To remove eventual print on the surface, use a glass cleanser or ammonia, rinse out accurately and dry with a cloth.

In case of persistent spots or scratches, use a specific detergent polishing product for stainless steel. Before using it on the product, try it in a hidden part to verify its efficiency and its nodamaging effect. Do not use metallic brushes, abrasive products, acid substances, bleach or chemical aggressive solvents.

Gres

Use a damp cloth wrung out in water; in the event of having to remove obstinate stains, use a universal detergent. Never use abrasive materials, acid substances or aggressive chemical solvents.

LEAF 002 sidetable

Design
Gordon Guillaumier

Description
Side table

Structure
AISI 304 stainless steel frame treated with electrostatic powder painting with polyester base that gives more protection from scratches and also the final coloring to the product.

Top
Gres

A hardwearing material obtained from compacting 99% pure materials such as minerals and clay at a high temperature (around 1250°) without the addition of synthetic resins or other chemical substances. The non-porous surface has a liquid absorption capacity of less than 0.5% so the material will be frost-proof, resistant to any type of stain and extremely resistant to surface abrasion. The compactness of the material and the quality of the minerals used in its production make it very resistant to impact and bending (2mm tolerance per linear metre). The material is Class A1 fire retardant and does not contain chlorine, asbestos or any other environmentally harmful substance.


Glazed gres

Glazed gres is obtained by subjecting gres to a special manufacturing process. After heating the material, the stoneware tile is dipped in tanks containing crystalline enamel in liquid form before being fired for the second time to vitrify the enamel. The material is Class A1 fire retardant and does not contain chlorine, asbestos or any other environmentally harmful substance.


Weight
Structure: 19 kg

Storage Cover
Available

Finishes

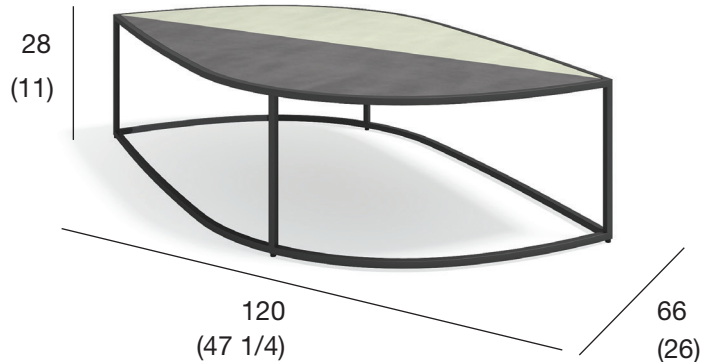


structure: 01 smoke



structure: 02 milk



structure: 01 smoke



structure: 02 milk




LEF002-01-51-52

smoke / gres top fog+ivory




LEF002-02-51-52

milk / gres top fog+ivory



LEF002-01-44-43

smoke / gl.gres top storm+taupe



LEF002-02-42-43

milk / gl.gres top ice+taupe




LEF002-01-51-53

smoke / gres top fog+ash



LEF002-02-51-53

milk / gres top fog+ash




LEF002-01-44-46

smoke / gl.gres top storm+jade




LEF002-02-42-44

milk / gl.gres top ice+storm




LEF002-01-51-54

smoke / gres top fog+nut



LEF002-02-51-54

milk / gres top fog+nut




LEF002-01-44-48

smoke / gl.gres top storm+water



LEF002-02-42-46

milk / gl.gres top ice+jade



LEF002-01-44-42

smoke / gl.gres top storm+ice



LEF002-02-42-48

milk / gl.gres top ice+water

Maintenance

Stainless Steel

In case of exposition to weather conditions, especially in corrosive environments, (for instance near the sea), to avoid rust formation, it is recommended to wash regularly the product with mild fresh water. If the product needs a thorough cleaning, use a neutral soap (UNIVERSAL CLEANER by RODA) and warm or mild water. Dry immediately to avoid stains and halos caused by water. Brush following the direction of polish (if the product is not painted) and use a microfiber cloth to obtain

a better result. To remove eventual print on the surface, use a glass cleanser or ammonia, rinse out accurately and dry with a cloth.

In case of persistent spots or scratches, use a specific detergent polishing product for stainless steel. Before using it on the product, try it in a hidden part to verify its efficiency and its nodamaging effect. Do not use metallic brushes, abrasive products, acid substances, bleach or chemical aggressive solvents.

Gres

Use a damp cloth wrung out in water; in the event of having to remove obstinate stains, use a universal detergent. Never use abrasive materials, acid substances or aggressive chemical solvents.