

Design


Gordon Guillaumier

Description

Rocking chair for outdoor use

Structure

Teak slats and powder coated steel frame.
Teak wood contains a natural oily resin which makes it extremely resistant to weather, temperature, parasite attacks and insects. The exposure outdoor creates a 1/2 mm-thick oxidation patina on the wood surface which favors its discoloration to a silver-grey color; this change does not affect its original characteristics in any way. The grey patina can be avoided or removed with the correct maintenance. Powder coated steel cleaned and treated with an electrolytic process of hard iron phosphatisation. This pre-painting guarantees a higher resistance to corrosion and it removes polluting substances. Its effect is reinforced with a following nanotechnology anticorrosive treatment and with an electrostatic powder painting with polyester base that gives more protection from scratches and also the final coloring to the product.

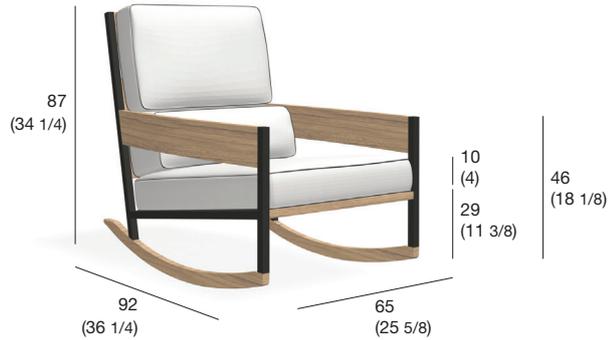

Cushions

Standard or hydro-draining

Weight

Structure 18 kg
Cushions: 5 kg

Storage cover

Not available

Finishes



NAP082-01-01
metal smoke /
teak

Maintenance

Teak

- In humid conditions, teak may release some reddish oil, which can cause stains on the surface. For normal cleaning, use a soft cloth (not in microfiber), fresh water and SUNDECK SOAP.
- use SUNDECK WOOD OIL LIGHT, a nutrient and protective oil, on the new product to avoid the superficial oxidation.
- use GREY OFF every 2/3 years to remove the grey patina due to the oxidation of the surface. After the treatment with GREY OFF, wash the furniture with water and SUNDECK SOAP and oil it with SUNDECK WOOD OIL LIGHT.
- In case of deep spots hard to clean with SUNDECK

SOAP, it is recommended to sand the surface uniformly before using GREY-OFF; in any case, do not use GREY-OFF more than once a year.
- Always avoid abrasive products or aggressive chemical solvents.

Steel

In case of exposition to weather conditions, it is recommended to wash regularly the product with mild tepid water. In case cleaning is needed, use a neutral soap (UNIVERSAL CLEANER RODA) and warm or mild water. Dry immediately to avoid stains and halos caused by water. Eventual rusty formation must be treated with a rust stopper and eventually touched up with the paint stick in the same color of structure, supplied by RODA.